

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
19 August 2004 (19.08.2004)

PCT

(10) International Publication Number  
**WO 2004/070752 A3**

(51) International Patent Classification<sup>7</sup>: **H02H 3/00**

(21) International Application Number:  
PCT/US2004/002596

(22) International Filing Date: 30 January 2004 (30.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/444,469 3 February 2003 (03.02.2003) US  
10/692,056 22 October 2003 (22.10.2003) US

(71) Applicant (for all designated States except US): LEVI-  
TON MANUFACTURING CO., INC. [US/US]; 59-25  
Little Neck Parkway, Little Neck, NY 11362 (US).

(72) Inventors: GERMAIN, Frantz; 142-10 243 Street,  
Rosedale, NY 11422 (US). HERZFELD, David; 8 Wood-  
hollow Lane, Huntington, NY 11743 (US). CALIXTO,

Armando; 79-14 261 Street, Floral Park, NY 11004 (US).  
CHAN, David; 83-34 250th Street, Bellerose, NY 11426  
(US). STEWART, Stephen; 4710-2 Hillcrest Drive,  
Berrien Springs, MI 49103 (US). STEWART, Stephen;  
4710-2 Hillcrest Drive, Berrien Springs, MI 49103 (US).


(74) Agents: SUTTON, Paul, J. et al.; Greenberg Traurig, LLP,  
885 Third Avenue, New York, NY 10022 (US).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: CIRCUIT INTERRUPTING DEVICE AND SYSTEM UTILIZING ELECTROMECHANICAL RESET

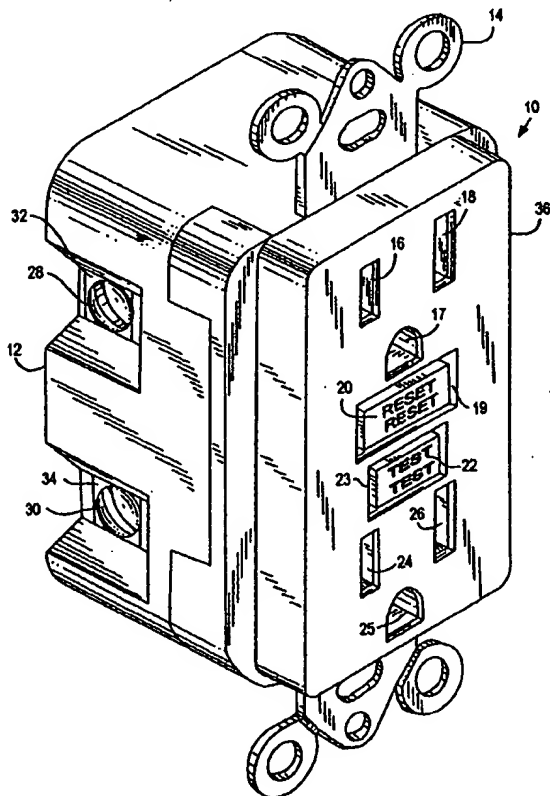

(57) Abstract: A GFCI device (10) which has reverse wiring  
protection is provided where no power is present at the face ter-  
minals (16, 24) even when the device is reverse wired. The de-  
vice also has a reset lockout feature that prevents it from being  
reset after having been tripped if the circuit interrupting portion  
of the device is non-operational.

WO 2004/070752 A3